

ZAŠTITNA BOČNA OGRADA SAFETY SIDE-RAILS

Sigurnosne bočne ograde ispunjavaju standard EN 60601-2-52.

Sprečavaju i smanjuju rizik povredjivanja pacijenata usled slučajnih padova. Optimalan stepen bočne pokrivenosti je oko 97 %
One su podeljene i pojedinačno rasklopive.


Mehanizam za zaključavanje u gornjem položaju napravljen je u obliku čelične šape i ima sigurnosnu ručicu koja onemogućava slučajno otključavanje

Safety side-rails complying the standard EN 60601-2-52.


Prevents and avoids the risk of injuries on patients accidental falls. Optimum grade of lateral coverage about 97%.

They are splitted and individually collapsible.

The locking on upper position is made by a steel paw and has a safety lever which impedes the accidental triggering.

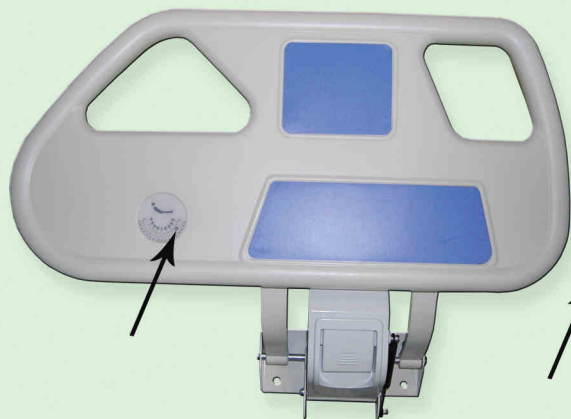

OG 1-4
ABS dvodelna sa amortizerom
OG 1-4
ABS twopiece with a shock absorber



L=71cm H= 35cm



ABS jednodelna sa amortizerom
OG 1-2

ABS onepiece with a shock absorber
OG 1-2

L=106 cm H= 30 cm



Aluminijumska
obarajuća ograda
OG 2 AL

Aluminium
bringing down railing
OG 2 AL

L=146 cm H= 42 cm



Stranica kod nogu (niža) Širina 95 cm x Visina 48 cm
Side on legs (lover) Width 95 cm x Height 48 cm



Stranica kod glave (višlja) Širina 95 cm x Visina 54 cm
Side on head (higher) Width 95 cm x Height 54 cm